
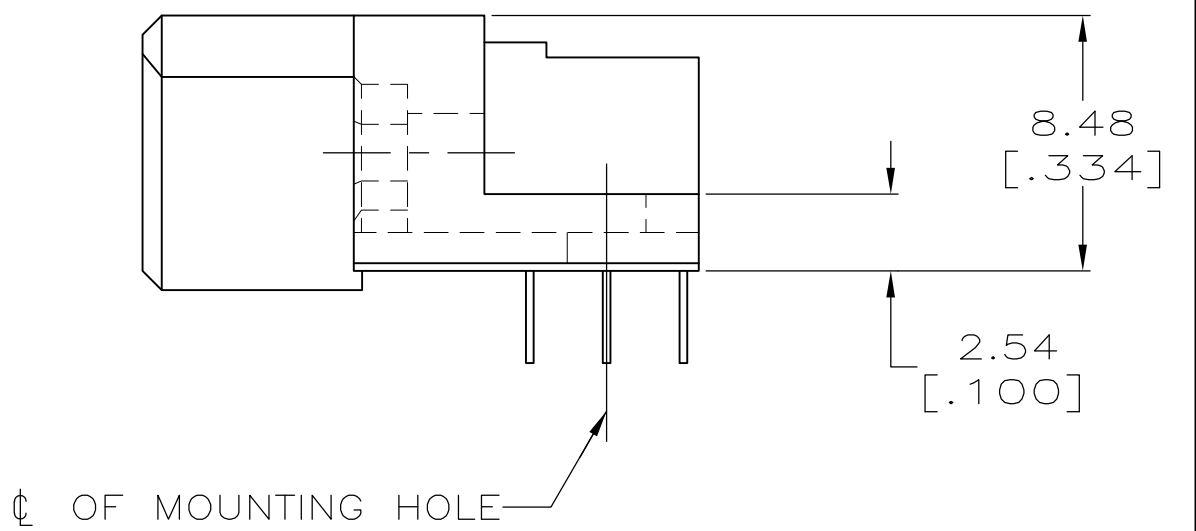
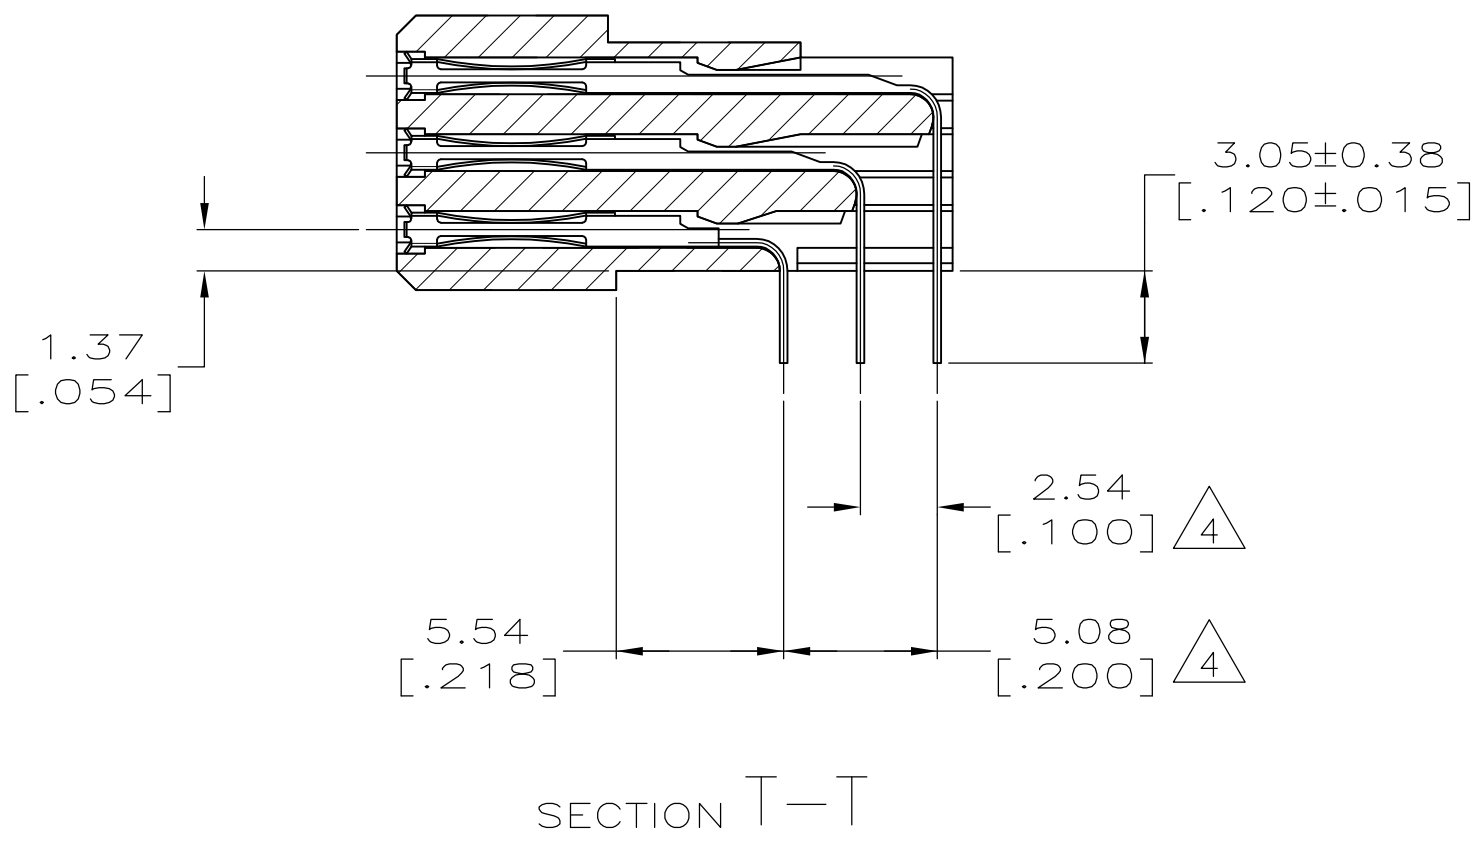
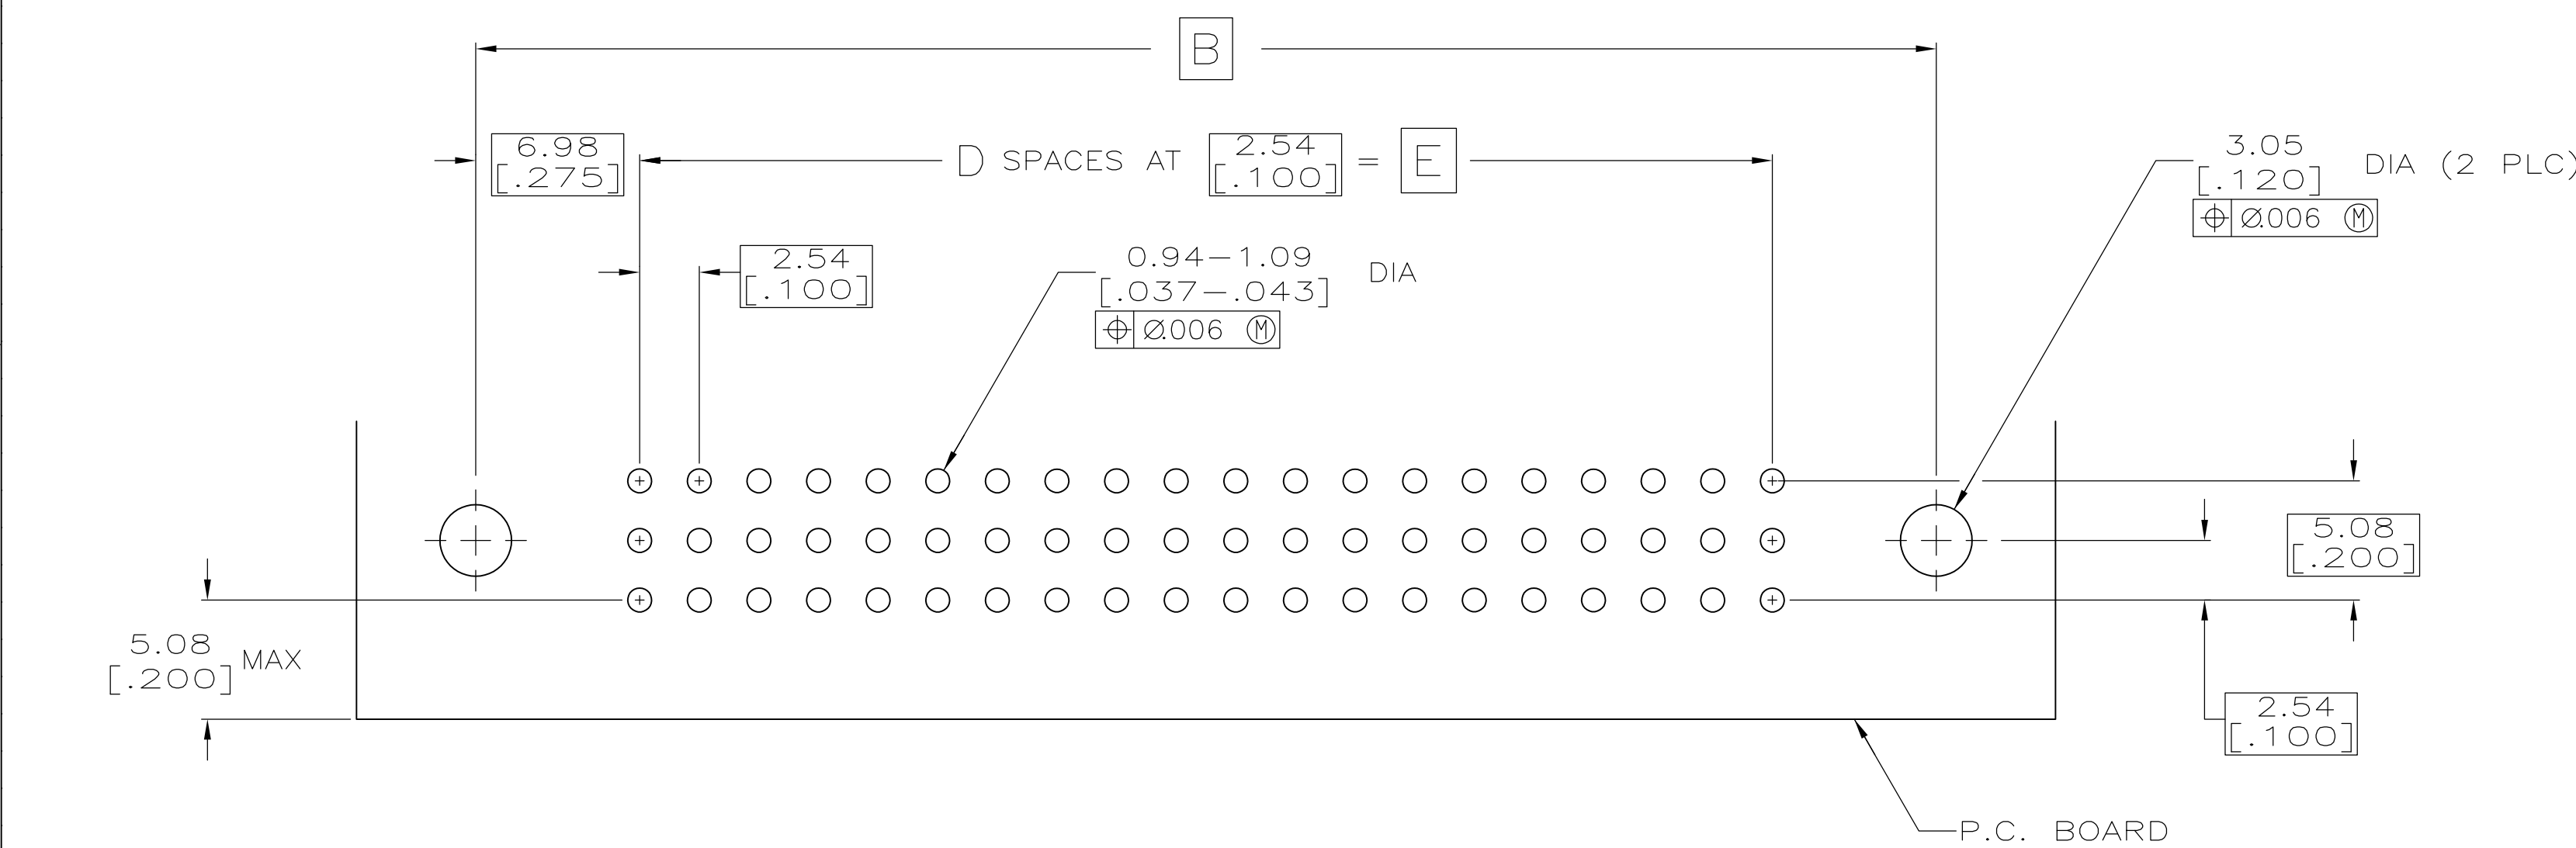
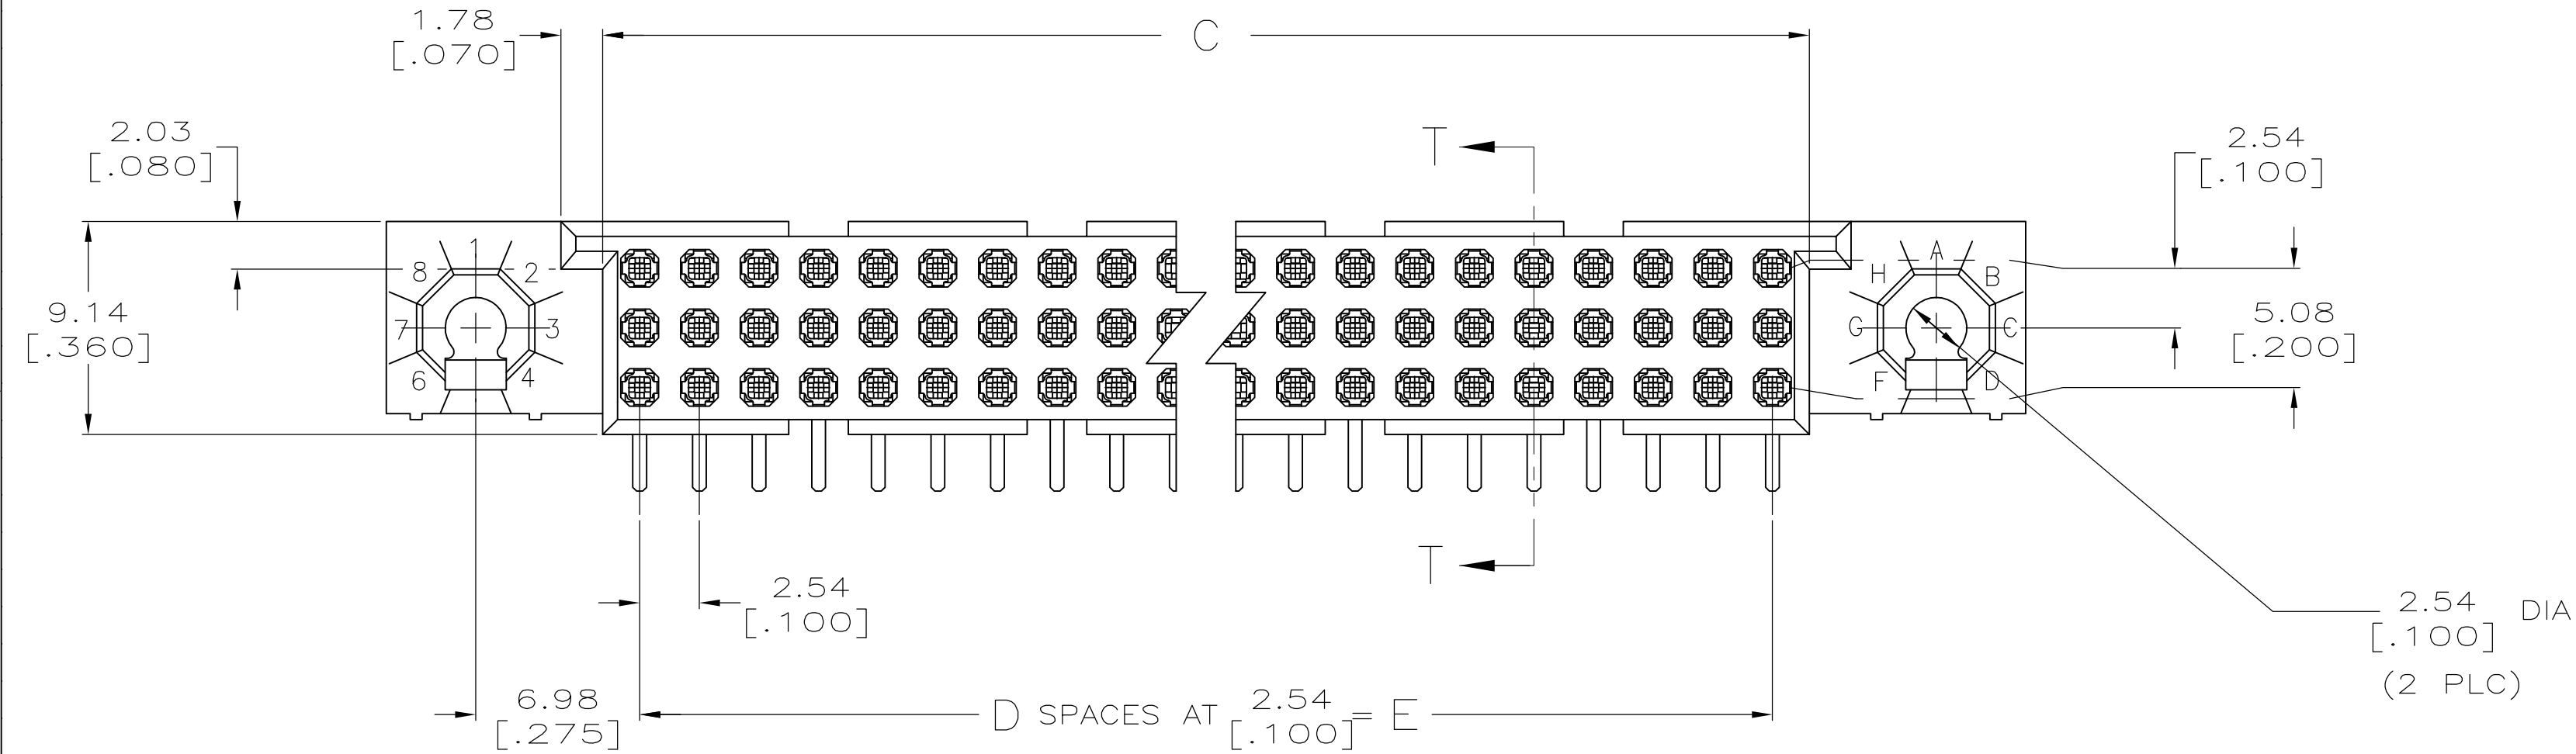


LOC		DIST		REVISIONS						
AD		00		P	LTR	DESCRIPTION		DATE	DWN	APVD
					M1	REVISED PER ECO-09-013678		02FEB10	DH	AS

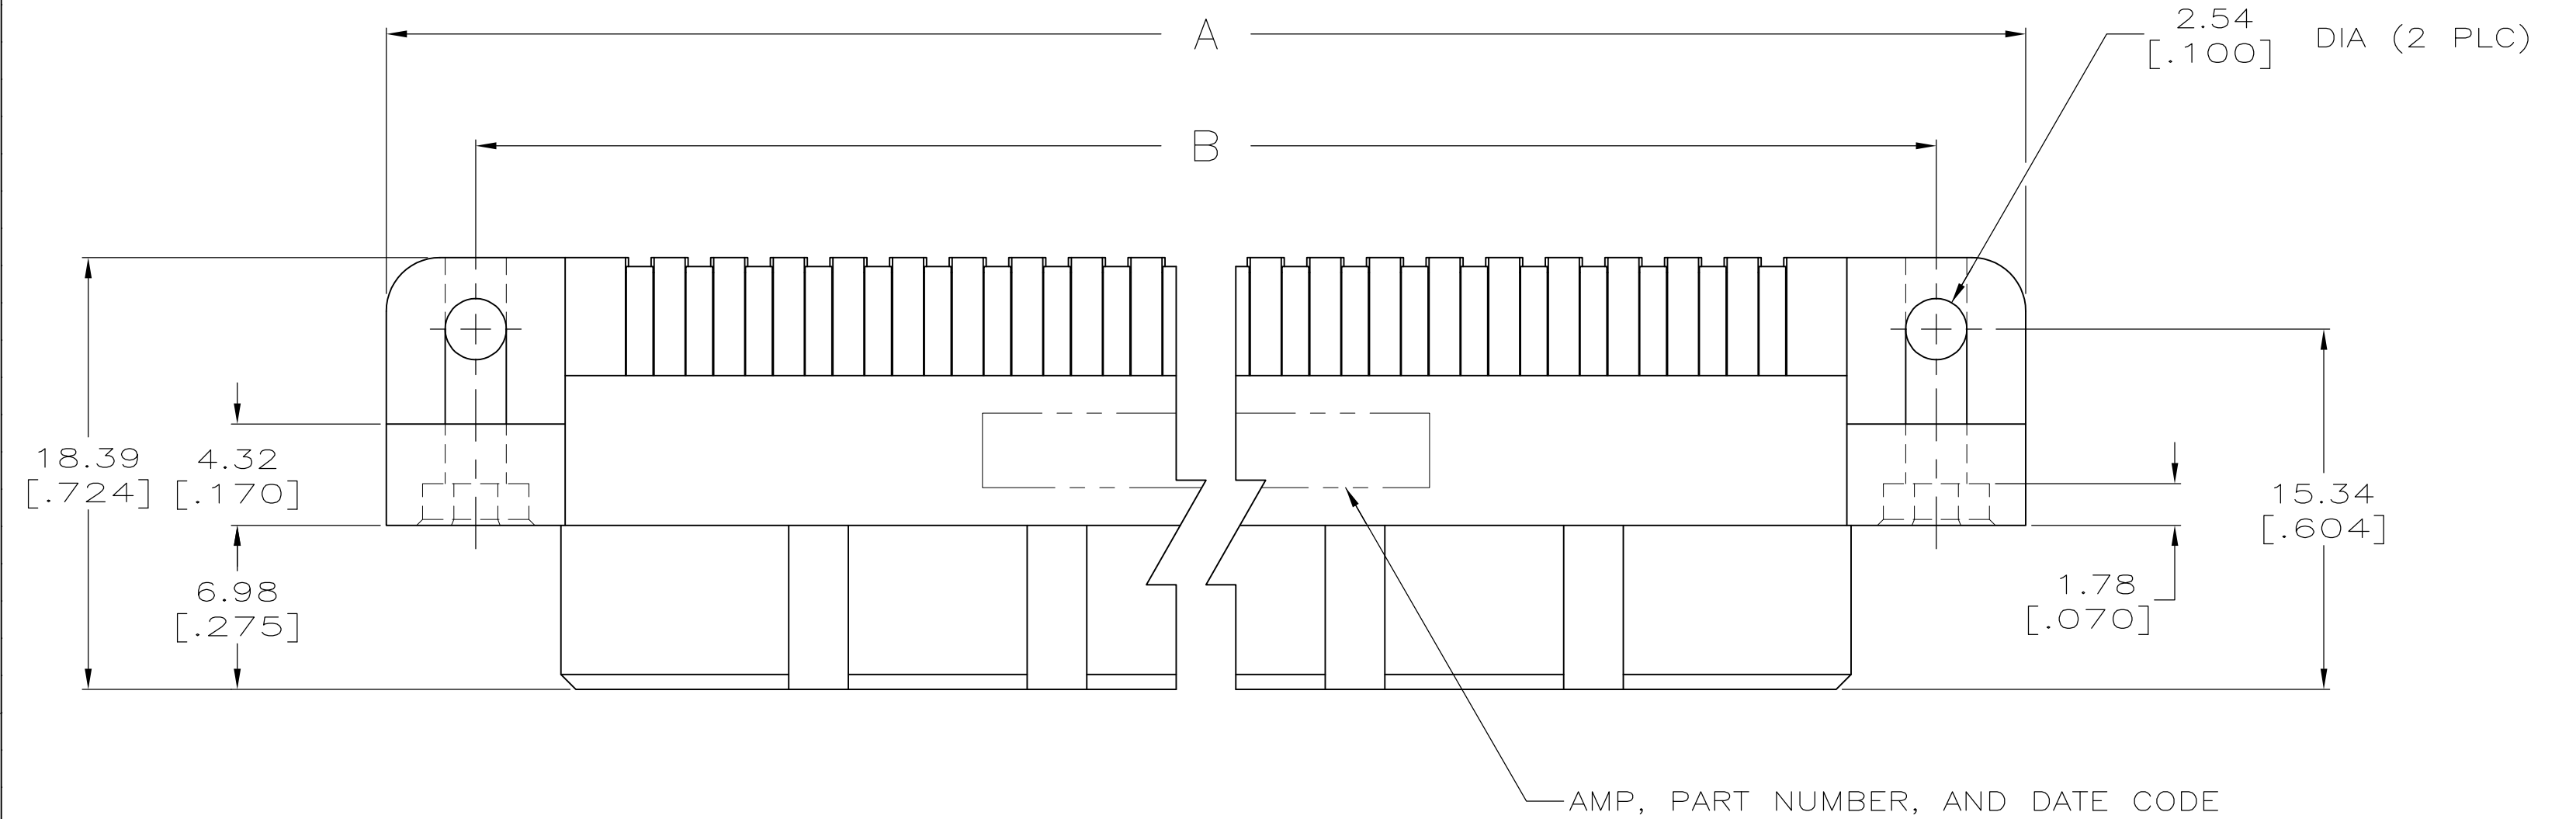

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.K. SEIFRIED CHK G. SKIPPER APVD G. SKIPPER	06/18/90 10/6/92 10/6/92	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME		HDI, 3 ROW, RECEPTACLE ASSEMBLY, 3.05 [.120] LONG SOLDER TAILS, .00076 [.000030] GOLD PLATE	
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.13 [.005] 4 PLC ± - ANGLES ± -	PRODUCT SPEC	APPLICATION SPEC	SIZE A1	CAGE CODE 00779
MATERIAL 	FINISH 	WEIGHT -	DRAWING NO. 533268	RESTRICTED TO -	REV M1
CUSTOMER DRAWING			SCALE 4:1	SHEET 1 OF 2	REV M1

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT 2005

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOCAD

DIST00

REVISONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—	SEE SHEET 1	—	—	—

1

HOUSING MATERIAL: THERMOPLASTIC, COLOR—NATURAL.

2

CONTACT MATERIAL: COPPER ALLOY.

3

CONTACT FINISH: .00127—.00254 [.000050—.000100] NICKEL UNDERPLATE ALL OVER; .00076 [.000030] GOLD PLATE IN CONTACT AREA, TIN—LEAD PLATED SOLDER TAILS.

4

SOLDER TAILS MUST FIT HOLE PATTERN AS SHOWN ON THE RECOMMENDED P.C. BOARD LAYOUT.

5. DIMENSIONS IN BRACKETS ARE IN INCHES.

6

HOUSINGS WITH CENTER MOUNTING IS RECOMMENDED FOR ASSEMBLIES HAVING 75 CONTACTS PER ROW OR MORE.

7

PART NUMBER IS OBSOLETE.

7	22.86 [.900]	—9—	26.01 [1.024]	36.83 [1.450]	44.45 [1.750]	—30—	2—533268—0
	81.28 [3.200]	32	84.43 [3.324]	95.25 [3.750]	102.87 [4.050]	99	1—533268—9
7	144.78 [5.700]	—57—	147.93 [5.824]	158.75 [6.250]	166.37 [6.550]	—174—	1—533268—8
6 7	251.46 [9.900]	—99—	254.61 [10.024]	265.43 [10.450]	273.05 [10.750]	—300—	1—533268—7
6 7	238.76 [9.400]	—94—	241.91 [9.524]	252.73 [9.950]	260.35 [10.250]	—285—	1—533268—6
6	226.06 [8.900]	89	229.21 [9.024]	240.03 [9.450]	247.65 [9.750]	270	1—533268—5
6 7	213.36 [8.400]	—84—	216.51 [8.524]	227.33 [8.950]	234.95 [9.250]	—255—	1—533268—4
6	200.66 [7.900]	79	203.81 [8.024]	214.63 [8.450]	222.25 [8.750]	240	1—533268—3
	187.96 [7.400]	74	191.11 [7.524]	201.93 [7.950]	209.55 [8.250]	225	1—533268—2
7	175.26 [6.900]	—69—	178.41 [7.024]	189.23 [7.450]	196.85 [7.750]	—210—	1—533268—1
7	162.56 [6.400]	—64—	165.71 [6.524]	176.53 [6.950]	184.15 [7.250]	—195—	1—533268—0
	149.86 [5.900]	59	153.01 [6.024]	163.83 [6.450]	171.45 [6.750]	180	533268—9
	137.16 [5.400]	54	140.31 [5.524]	151.13 [5.950]	158.75 [6.250]	165	533268—8
	124.46 [4.900]	49	127.61 [5.024]	138.43 [5.450]	146.05 [5.750]	150	533268—7
	111.76 [4.400]	44	114.91 [4.524]	125.73 [4.950]	133.35 [5.250]	135	533268—6
	99.06 [3.900]	39	102.21 [4.024]	113.03 [4.450]	120.65 [4.750]	120	533268—5
	86.36 [3.400]	34	89.51 [3.524]	100.33 [3.950]	107.95 [4.250]	105	533268—4
	78.74 [3.100]	31	81.89 [3.224]	92.71 [3.650]	100.33 [3.950]	96	533268—3
7	73.66 [2.900]	—29—	76.81 [3.024]	87.63 [3.450]	95.25 [3.750]	—90—	533268—2
7	60.96 [2.400]	—24—	64.11 [2.524]	74.93 [2.950]	82.55 [3.250]	—75—	533268—1
	E	D	C	B	A	POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R. K. SEIFRIED
CHK
G. SKIPPER
APVD
G. SKIPPER

06/18/90
10/6/92
10/6/92

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± —
1 PLC ± —
2 PLC ± —
3 PLC ± 0.13 [.005]
4 PLC ± —
ANGLES ± —



MATERIAL

FINISH

DWN
R. K. SEIFRIED
CHK
G. SKIPPER
APVD
G. SKIPPER

06/18/90
10/6/92
10/6/92

SIZE
A1

CADE CODE
00779

DRAWING NO
533268

RESTRICTED TO

—

CUSTOMER DRAWING

SCALE 4:1

SHEET 2 OF 2

REV M1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT 2005

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOCAD

DIST00

REVISONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—	SEE SHEET 1	—	—	—

1

HOUSING MATERIAL: THERMOPLASTIC, COLOR—NATURAL.

2

CONTACT MATERIAL: COPPER ALLOY.

3

CONTACT FINISH: .00127—.00254 [.000050—.000100] NICKEL UNDERPLATE ALL OVER; .00076 [.000030] GOLD PLATE IN CONTACT AREA, TIN—LEAD PLATED SOLDER TAILS.

4

SOLDER TAILS MUST FIT HOLE PATTERN AS SHOWN ON THE RECOMMENDED P.C. BOARD LAYOUT.

5. DIMENSIONS IN BRACKETS ARE IN INCHES.

6

HOUSINGS WITH CENTER MOUNTING IS RECOMMENDED FOR ASSEMBLIES HAVING 75 CONTACTS PER ROW OR MORE.

7

PART NUMBER IS OBSOLETE.

7	22.86 [.900]	—9—	26.01 [1.024]	36.83 [1.450]	44.45 [1.750]	—30—	2—533268—0
	81.28 [3.200]	32	84.43 [3.324]	95.25 [3.750]	102.87 [4.050]	99	1—533268—9
7	144.78 [5.700]	—57—	147.93 [5.824]	158.75 [6.250]	166.37 [6.550]	—174—	1—533268—8
6 7	251.46 [9.900]	—99—	254.61 [10.024]	265.43 [10.450]	273.05 [10.750]	—300—	1—533268—7
6 7	238.76 [9.400]	—94—	241.91 [9.524]	252.73 [9.950]	260.35 [10.250]	—285—	1—533268—6
6	226.06 [8.900]	89	229.21 [9.024]	240.03 [9.450]	247.65 [9.750]	270	1—533268—5
6 7	213.36 [8.400]	—84—	216.51 [8.524]	227.33 [8.950]	234.95 [9.250]	—255—	1—533268—4
6	200.66 [7.900]	79	203.81 [8.024]	214.63 [8.450]	222.25 [8.750]	240	1—533268—3
	187.96 [7.400]	74	191.11 [7.524]	201.93 [7.950]	209.55 [8.250]	225	1—533268—2
7	175.26 [6.900]	—69—	178.41 [7.024]	189.23 [7.450]	196.85 [7.750]	—210—	1—533268—1
7	162.56 [6.400]	—64—	165.71 [6.524]	176.53 [6.950]	184.15 [7.250]	—195—	1—533268—0
	149.86 [5.900]	59	153.01 [6.024]	163.83 [6.450]	171.45 [6.750]	180	533268—9
	137.16 [5.400]	54	140.31 [5.524]	151.13 [5.950]	158.75 [6.250]	165	533268—8
	124.46 [4.900]	49	127.61 [5.024]	138.43 [5.450]	146.05 [5.750]	150	533268—7
	111.76 [4.400]	44	114.91 [4.524]	125.73 [4.950]	133.35 [5.250]	135	533268—6
	99.06 [3.900]	39	102.21 [4.024]	113.03 [4.450]	120.65 [4.750]	120	533268—5
	86.36 [3.400]	34	89.51 [3.524]	100.33 [3.950]	107.95 [4.250]	105	533268—4
	78.74 [3.100]	31	81.89 [3.224]	92.71 [3.650]	100.33 [3.950]	96	533268—3
7	73.66 [2.900]	—29—	76.81 [3.024]	87.63 [3.450]	95.25 [3.750]	—90—	533268—2
7	60.96 [2.400]	—24—	64.11 [2.524]	74.93 [2.950]	82.55 [3.250]	—75—	533268—1
	E	D	C	B	A	POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R. K. SEIFRIED
CHK
G. SKIPPER
APVD
G. SKIPPER

06/18/90
10/6/92
10/6/92

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± —
1 PLC ± —
2 PLC ± —
3 PLC ± 0.13 [.005]
4 PLC ± —
ANGLES ± —



MATERIAL

FINISH

DWN
R. K. SEIFRIED
CHK
G. SKIPPER
APVD
G. SKIPPER

06/18/90
10/6/92
10/6/92

SIZE
A1

CADE CODE
00779

DRAWING NO
533268

RESTRICTED TO

—

CUSTOMER DRAWING

SCALE 4:1

SHEET 2 OF 2

REV M1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT 2005

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOCAD

DIST00

REVISONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—	SEE SHEET 1	—	—	—

1

HOUSING MATERIAL: THERMOPLASTIC, COLOR—NATURAL.

2

CONTACT MATERIAL: COPPER ALLOY.

3

CONTACT FINISH: .00127—.00254 [.000050—.000100] NICKEL UNDERPLATE ALL OVER; .00076 [.000030] GOLD PLATE IN CONTACT AREA, TIN—LEAD PLATED SOLDER TAILS.

4

SOLDER TAILS MUST FIT HOLE PATTERN AS SHOWN ON THE RECOMMENDED P.C. BOARD LAYOUT.

5. DIMENSIONS IN BRACKETS ARE IN INCHES.

6

HOUSINGS WITH CENTER MOUNTING IS RECOMMENDED FOR ASSEMBLIES HAVING 75 CONTACTS PER ROW OR MORE.

7

PART NUMBER IS OBSOLETE.

7	22.86 [.900]	—9—	26.01 [1.024]	36.83 [1.450]	44.45 [1.750]	—30—	2—533268—0
	81.28 [3.200]	32	84.43 [3.324]	95.25 [3.750]	102.87 [4.050]	99	1—533268—9
7	144.78 [5.700]	—57—	147.93 [5.824]	158.75 [6.250]	166.37 [6.550]	—174—	1—533268—8
6 7	251.46 [9.900]	—99—	254.61 [10.024]	265.43 [10.450]	273.05 [10.750]	—300—	1—533268—7
6 7	238.76 [9.400]	—94—	241.91 [9.524]	252.73 [9.950]	260.35 [10.250]	—285—	1—533268—6
6	226.06 [8.900]	89	229.21 [9.024]	240.03 [9.450]	247.65 [9.750]	270	1—533268—5
6 7	213.36 [8.400]	—84—	216.51 [8.524]	227.33 [8.950]	234.95 [9.250]	—255—	1—533268—4
6	200.66 [7.900]	79	203.81 [8.024]	214.63 [8.450]	222.25 [8.750]	240	1—533268—3
	187.96 [7.400]	74	191.11 [7.524]	201.93 [7.950]	209.55 [8.250]	225	1—533268—2
7	175.26 [6.900]	—69—	178.41 [7.024]	189.23 [7.450]	196.85 [7.750]	—210—	1—533268—1
7	162.56 [6.400]	—64—	165.71 [6.524]	176.53 [6.950]	184.15 [7.250]	—195—	1—533268—0
	149.86 [5.900]	59	153.01 [6.024]	163.83 [6.450]	171.45 [6.750]	180	533268—9
	137.16 [5.400]	54	140.31 [5.524]	151.13 [5.950]	158.75 [6.250]	165	533268—8
	124.46 [4.900]	49	127.61 [5.024]	138.43 [5.450]	146.05 [5.750]	150	533268—7
	111.76 [4.400]	44	114.91 [4.524]	125.73 [4.950]	133.35 [5.250]	135	533268—6
	99.06 [3.900]	39	102.21 [4.024]	113.03 [4.450]	120.65 [4.750]	120	533268—5
	86.36 [3.400]	34	89.51 [3.524]	100.33 [3.950]	107.95 [4.250]	105	533268—4
	78.74 [3.100]	31	81.89 [3.224]	92.71 [3.650]	100.33 [3.950]	96	533268—3
7	73.66 [2.900]	—29—	76.81 [3.024]	87.63 [3.450]	95.25 [3.750]	—90—	533268—2
7	60.96 [2.400]	—24—	64.11 [2.524]	74.93 [2.950]	82.55 [3.250]	—75—	533268—1
	E	D	C	B	A	POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R. K. SEIFRIED
CHK
G. SKIPPER
APVD
G. SKIPPER

06/18/90
10/6/92
10/6/92

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± —
1 PLC ± —
2 PLC ± —
3 PLC ± 0.13 [.005]
4 PLC ± —
ANGLES ± —



MATERIAL

FINISH

DWN
R. K. SEIFRIED
CHK
G. SKIPPER
APVD
G. SKIPPER

06/18/90
10/6/92
10/6/92

SIZE
A1

CADE CODE
00779

DRAWING NO
533268

RESTRICTED TO

—

CUSTOMER DRAWING

SCALE 4:1

SHEET 2 OF 2

REV M1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT 2005

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOCAD

DIST00

REVISONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—	SEE SHEET 1	—	—	—

1

HOUSING MATERIAL: THERMOPLASTIC, COLOR—NATURAL.

2

CONTACT MATERIAL: COPPER ALLOY.

3

CONTACT FINISH: .00127—.00254 [.000050—.000100] NICKEL UNDERPLATE ALL OVER; .00076 [.000030] GOLD PLATE IN CONTACT AREA, TIN—LEAD PLATED SOLDER TAILS.

4

SOLDER TAILS MUST FIT HOLE PATTERN AS SHOWN ON THE RECOMMENDED P.C. BOARD LAYOUT.

5. DIMENSIONS IN BRACKETS ARE IN INCHES.

6

HOUSINGS WITH CENTER MOUNTING IS RECOMMENDED FOR ASSEMBLIES HAVING 75 CONTACTS PER ROW OR MORE.

7

PART NUMBER IS OBSOLETE.

7	22.86 [.900]	—9—	26.01 [1.024]	36.83 [1.450]	44.45 [1.750]	—30—	2—533268—0
	81.28 [3.200]	32	84.43 [3.324]	95.25 [3.750]	102.87 [4.050]	99	1